

compact and rollable solar charger

specification sheet

Application : portable solar charger for electronic devices

Power : 13.5 W

Operating voltage (Vmpp) : 15 V*

Operating current (Impp) : 900 mA *

Open circuit voltage (Voc) : 23 V *

Short circuit current (Isc) : 1200 mA*

Rolled dimensions : 350 mm x Ø 80 mm

Unrolled dimensions : 350 mm x 1500 mm

Thickness : 1.2 mm

Temperature operating range : -20°C to +60°C

Weight : 1100 g

Connector : universal cigarette lighter socket (male and female)

Available accessories : AA and AAA battery charger, cigarette lighter adaptor for mobile phones, PDA's and USB connections

CE Approval

* measured at Standard Testing Conditions (STC), 1000W/m², AM 1.5, 25°C



sunpack 3 years warranty
solar energy for portable electronic devices




rollable



do not fold



weatherproof

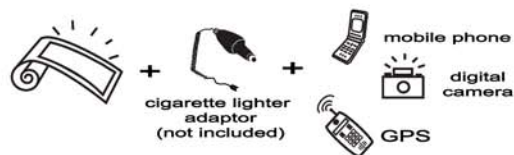

easy plug



easy parallel connection



14 W	15 VDC	900 mA	/	battery capacity (mAh) :	600	900	1200	1500	2000
charging time in hours (measured in full sunshine)					0h40	1h00	1h20	1h40	2h15
2 x 14 W connected in parallel (15 VDC 1800mA)					0h20	0h30	0h40	0h50	1h10